

Technical Profile

CS Range - C&D Drive

Magnet drive, end suction, centrifugal pumps - chemical service range

The CS product covers an hydraulic range that is split between four frame sizes, C, D, E & F (for frame E & F, refer to separate Technical Profile).


The pumps are supplied with a range of torque ring drives rated to match prime mover performance. Prime mover specifications of all denominations can be catered for.

The torque ring (induced) drive, invented by Sundyne HMD Kontro, enables the pumps to operate at high temperatures without cooling. All the pumps covered by this range are particularly suited to handling high temperature mediums.

The standard materials of construction are stainless steel with carbon internal bearings for the 'C' frame.

The standard materials of construction are carbon steel with carbon internal bearings for the 'D' frame.

Performance of the CS range

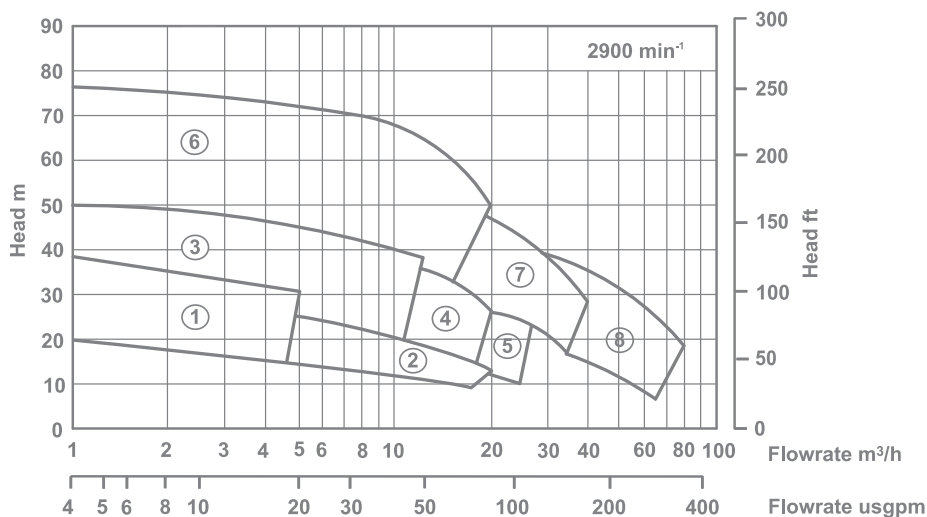

Pump model

1	1C/H	3	1D/H	5	1D/L	7	2D/M
2	1C/L	4	1D/M	6	2D/H	8	2D/L

HMD Kontro



Design range limits

The CS pump is designed to operate from -112°F up to 850°F, -80°C up to 450°C without the need for any ancillary cooling medium. Design working pressure is 290 psi, 20 bar.

Solids handling

The unit is capable of handling solids up to 1.5% w/w less than 100 microns.

Options

Materials of construction

Wetted parts
Stainless Steel ('D' frame)
Gasket
Graphite

Other options

Jacketed pump casing
Secondary Control
Coupling housing drain
Coupling feed filtration
Large range of pump protection


Key Design Features

- **Sealless design** - total product containment - ideal for hydrocarbon, petrochemical, toxic, aggressive, hot, crystallising and valuable product.
- Modular/Interchangeable high efficiency wet end, designed to ensure maximum flow/head coverage across all CS product ranges.
- Modular/Interchangeable high efficiency magnetic couplings.
- Choice of various metallic materials of construction.
- One joint casing/containment shroud/shell design
- Casing gasket fully confined to eliminate 'blowout' risk.
- Various suction and discharge flange connection options.
- Maximum interchangeability exists between spare parts for the entire range.
- Cartridge assemblies allowing fast replacement of the rotating element.
- Internationally approved pressure vessel standard: ASME VIII code.

Benefits of CS 'C&D' pump range

- Ease of application
- Low capital cost
- Design ensures safe, leak free operation
- Low running costs
- Minimal spares holding
- Minimal downtime/fast maintenance
- Maximises on-line process time

Construction of CS 'C&D' pump

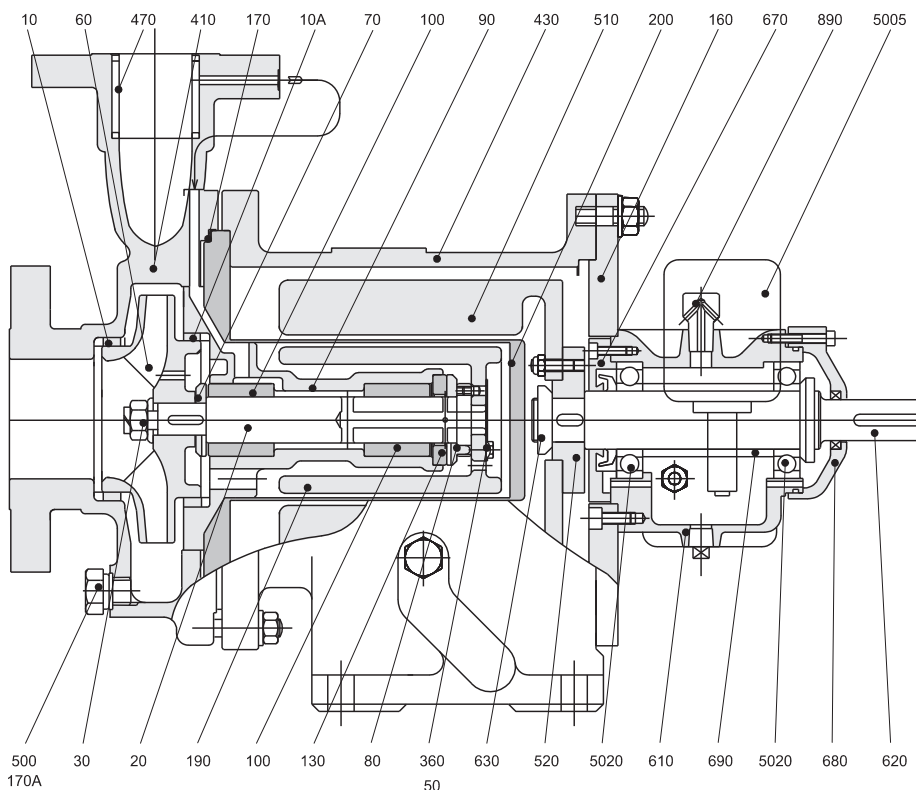

10	Front Neck Ring	Carbon Steel
10A	Back Neck Ring	Carbon Steel
20	Pump Shaft	Stainless Steel
30	Impeller Fixing	Stainless Steel
50	Coupling Washer	Stainless Steel
60	Impeller	Cast Iron
70	Thrust Washer (Front)	Stainless Steel
80	Thrust Washer (Back)	Stainless Steel
90	Bush Holder	Cast Iron
100	Bush	Carbon
130	Thrust Pad	Carbon
160	Adaptor Flange	Carbon Steel
170	Gasket (Casing)	CSF
170A	Gasket (Drain)	CSF
190	Torque Ring	Stainless Steel
200	Containment Shroud/Shell	Alloy C & 316L SS
360	Coupling Fixing	Stainless Steel
410	Casing	Carbon Steel
430	Coupling Housing	SG Iron
470	Strainer Basket	Stainless Steel
500	Drain Plug	Stainless Steel
510	Outer Magnet Ring	Carbon Steel
520	Drive Shaft Adaptor	Carbon Steel
610	Bearing Housing	SG Iron
620	Drive Shaft	Carbon Steel
630	Drive Shaft Nut (Kit)	Carbon Steel
670	Front Cap	Carbon Steel
680	Back Cap	Carbon Steel
690	Spacer	Carbon Steel
890	Breather / Filler Plug	Carbon Steel
5005	Constant Level Oiler	Proprietary
5020	Race (Kit)	Proprietary
****	Fixings (Kit)	Various

Flanges and Connections

Casing

Suction and discharge flanges are designed in accordance with the following relevant standards:

ANSI B16.5 Class 150 Machined with 0.06" (1.5mm) high raised face having a continuous spiral groove.

ANSI B16.5 Class 300 Machined with 0.06" (1.5mm) high raised face having a continuous spiral groove.

DIN 2545 PN40 Machined with 2mm high raised face with a continuous spiral groove. (Note: these flanges are identical to BS4504 PN40).

Flange Loadings

Allowable flange loadings imposed by pipework are in accordance with Table 2 of API 610 8th edition and exceed the values in ISO 5199 Annex C.

Drain Connections

The following drain options are available:

Standard: 1/2" BSP drain plug fitted with fully trapped gaskets.



Option 1: No drain, boss left undrilled.

Option 2: 1/2" flanged drain rated to the casing flanges.

Gauge Connections:

No provision for gauge connections has been made on this frame of pump.

Dimensions of CS 'C&D' pump

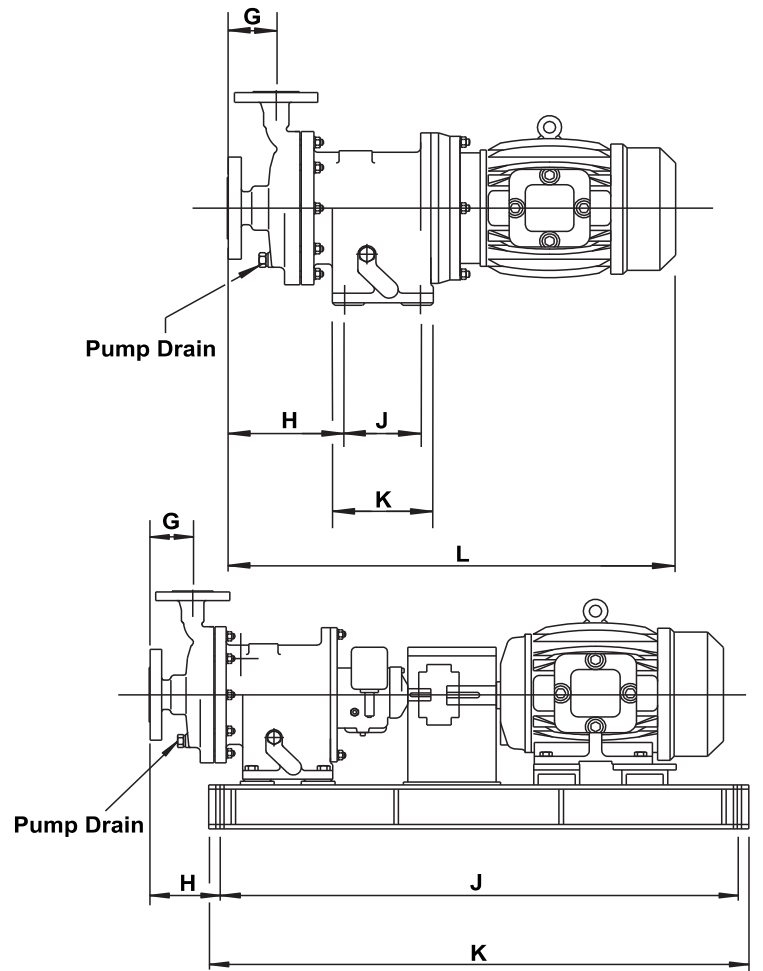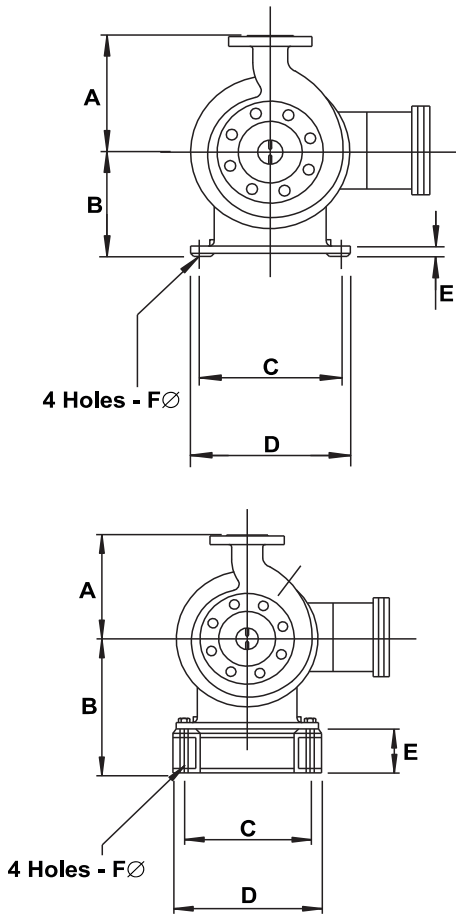

Pump size	A	B	C	D	E	F	G	H	J	K	Motor Frame	L
CS1CCH	6.3"/160	5.9"/150	9"/230	10.2"/260	0.6"/15	0.55"/14	4.1"/105	6.5"/164	4.3"/110	6.7"/170	80-90	23.6"/600
CS1CCL	6.3"/160	5.9"/150	9"/230	10.2"/260	0.6"/15	0.55"/14	4.3"/110	6.7"/170	4.3"/110	6.7"/170	100-112	26.2"/665
											143-145	23.2"/590
											182-184	25.8"/657
CS1DCH	8.9"/225	7.9"/200	10.6"/270	12.2"/310	1"/25	0.7"/18	3.1"/80	8.3"/210	6.3"/160	7.9"/200	90	27.6"/700
CS1DCM	8.9"/225	7.9"/200	10.6"/270	12.2"/310	1"/25	0.7"/18	3.1"/80	8.3"/210	6.3"/160	7.9"/200	100-112	29.9"/760
CS1DCL	9.5"/240	7.9"/200	10.6"/270	12.2"/311	1"/25	0.7"/18	3.1"/80	8.9"/227	6.3"/160	7.9"/200	132	34.2"/870
CS2DCH	10.4"/265	7.9"/200	10.6"/270	12.2"/310	1"/25	0.7"/18	3.1"/80	8.7"/220	6.3"/160	7.9"/200	160	40.1"/1020
CS2DCM	9.5"/240	7.9"/200	10.6"/270	12.2"/310	1"/25	0.7"/18	3.9"/100	9"/230	6.3"/160	7.9"/200	182-184	29.6"/752
CS2DCL	9.5"/240	7.9"/200	10.6"/270	12.2"/310	1"/25	0.7"/18	3.9"/100	8.9"/225	6.3"/160	7.9"/200	213-215	32.4"/822
											254-256	40.1"/1020
											284-286	42.5"/1080

Pump size	A	B	E	F	G	H	Motor Frame	C	D	J	K	L
CS1CSH	6.3"/160	7.1"/180	0.94"/24	0.55"/14	4.1"/105	3.9"/100	80-90	8.6"/225	10.8"/275	29.5"/750	31.5"/800	34.6"/880
CS1CSL	6.3"/160	7.1"/180	0.94"/24	0.55"/14	4.3"/110	4.3"/109	100-112	8.6"/225	10.8"/275	31.9"/810	33.8"/860	37"/940
CS1DSH	8.9"/225	12.2"/310	4.3"/110	0.7"/18	3.1"/80	5.5"/140	143-145	9"/228	11"/280	30"/760	32"/813	36"/914
CS1DSM	8.9"/225	12.2"/310	4.3"/110	0.7"/18	3.1"/80	5.9"/150	182-184	9"/228	11"/280	30"/760	32"/813	36"/914
CS1DSL	9.5"/240	12.2"/310	4.3"/110	0.7"/18	3.1"/80	6.2"/157	90	11"/280	13"/330	32.5"/825	34.5"/875	40.8"/1000
CS2DSH	10.4"/265	12.2"/310	4.3"/110	0.7"/18	3.1"/80	5.9"/150	100-112	11"/280	13"/330	34.5"/875	37.7"/958	41.3"/1050
CS2DSM	9.5"/240	12.2"/310	4.3"/110	0.7"/18	3.9"/100	6.3"/160	132	11"/280	13"/330	39.4"/1000	41.3"/1050	45.9"/1165
CS2DSL	9.5"/240	12.2"/310	4.3"/110	0.7"/18	3.9"/100	6.1"/155	160	11"/280	13"/330	45.3"/1150	47.2"/1200	53.8"/1320
							182-184	11"/280	13"/330	33"/838	35"/890	41"/1041
							213-215	11"/280	13"/330	35"/890	37"/940	43.5"/1005
							254-256	11"/280	13"/330	40"/1016	42"/1067	50"/1270

Dimensions shown are metric imperial (inches) / (mm).

Range capabilities

Model	Head	Flow	Design Temperature	Design Pressure	Viscosity cSt	Mounting
CS1 C	131 ft 40 m	88 USgpm 20 m ³ /h	-112 to 850°F -80 to 450°C	290 psi 20 bar	200	Separate Mounted (SM) Close Coupled (CC)
CS1 D	164 ft 50 m	110 USgpm 25 m ³ /h	-112 to 850°F -80 to 450°C	290 psi 20 bar	200	Separate Mounted (SM) Close Coupled (CC)
CS2 D	252 ft 77 m	352 USgpm 80 m ³ /h	-112 to 850°F -80 to 450°C	290 psi 20 bar	200	Separate Mounted (SM) Close Coupled (CC)

Dimensions shown are imperial (inches) / metric (mm).

Pressure Limits

All parts are to be rated to the pressures shown below at 100°F / 38°C

Flange standard	Design pressure	
	316 St St	Carbon Steel
ANSI B16.5 Class 150	1.89 MPa 275 psi	1.89 MPa 275 psi
BS 4504 Class 300	2.0 MPa 290 psi	2.0 MPa 290 psi
DIN 2543 PN 40	4.0 MPa 580 psi	4.0 MPa 580 psi

Component	Hydrostatic test values	
	316 St St	
Casing	3.1 MPa 450 psi	3.1 MPa 450 psi
Containment Shroud/Shell	3.1 MPa 450 psi	3.1 MPa 450 psi

Temperature limits

Standard Range	-110°F to 660°F / -80°C to 350°C
Option	840°F / 450°C

For sub zero temperatures a suitable sealing compound (Loctite Multi Gasket or similar) is used to prevent the ingress of moisture into the coupling housing between the containment shroud/shell, coupling/bearing and motor adaptor assembly interface.

Sundyne Headquarters:
Sundyne, LLC
 14845 West 64th Avenue
 Arvada, Colorado 80007
 USA
 1-866-Sundyne
 Phone: 1 303 425 0800
 Fax: 1 303 940 2911
 www.sundyne.com

Sundyne United Kingdom:
Sundyne HMD Kontro Sealless Pumps
 Marshall Road
 Hampden Park Industrial Estate
 Eastbourne East Sussex, BN22 9AN
 United Kingdom
 Phone: +44 (0)1323 452000
 Fax: +44 (0)1323 503369

Sundyne China:
Sundyne Industrial Equipment (Tianjin) Company Limited
 Building 1, No. 879 Shen Fu Road
 XinZhuang Industrial Zone
 Min Hang District
 Shanghai, China 201108
 Phone: +86 21 5055 5005
 Fax: +86 21 5442 5265

Sundyne France:
Sundyne International S.A.
 13-15, Bld. Eiffel - B.P. 30
 21604 Longvic Cedex
 France
 Phone: +33 (0)3 80 38 33 00
 Fax: +33 (0)3 80 38 33 66

Sundyne Spain:
Sundyne Marelli Bombas, S.R.L.
 Ctra. Madrid-Toledo, Km.30.8
 45200 Illescas
 Toledo, Spain
 Phone: +34 925 53 45 00
 Fax: +34 925 51 16 00

Worldwide Sales Headquarters
 Unit 2 Harvington Business Park
 Brampton Road
 Hampden Park Industrial Estate
 Eastbourne East Sussex, BN22 9BN
 United Kingdom
 Phone: +44 (0)1323 452125

All information provided is subject to change without notice.

© 2014 Sundyne, LLC
 All Rights Reserved. Other logos and trade names are property of their respective owners.

Sundyne HMD Kontro
 CS Range TP 2.0 9/14 Letter